




主要特征


- 最大温度范围: $-40 \dots +400^{\circ}\text{C}$
- 参考允差: 标准 IEC 584.2 等级 2:
对于 J, K 型: $\pm 2,5^{\circ}\text{C}$ ($-40 \dots +333^{\circ}\text{C}$)
 $\pm 0.0075 [t]$ ($t > +333^{\circ}\text{C}$)
- 紧密型绝缘热电偶和连续金属护套 (MgO 绝缘)
- 电缆 DIN 标准

产品型号


TCMCP

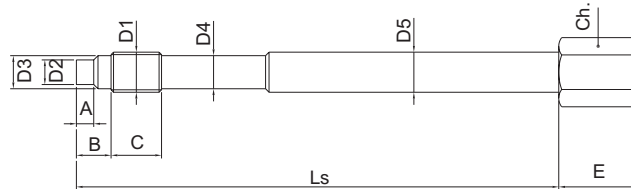


TCMCC

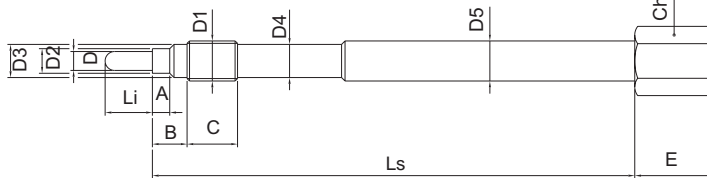

TCMCE

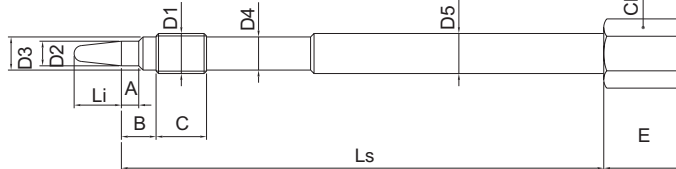

TCMGF

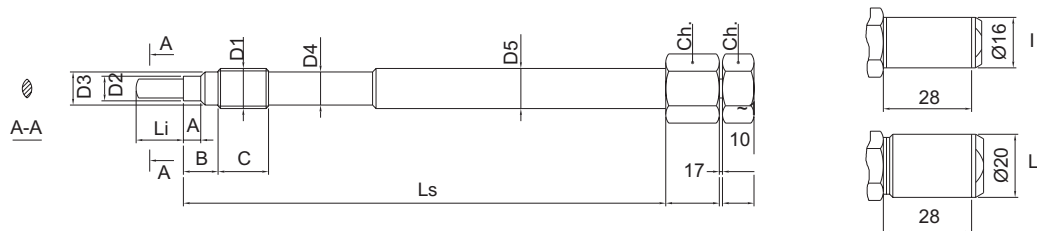

D1	D2	D3	D	D4	D5	A	B	C	Ls	Ch	E	Li
1/2-20UNF	∅ 7,8	∅ 10,5	∅ 6	∅ 10,5	∅ 12,7	5,5	11	16	90-153	17-19	17-25	浸入长度
M18x1,5	∅ 10	∅ 16	∅ 7	∅ 16	∅ 17,8	6	14	20	90-153	19	17-25	浸入长度

